


TOOL LASER PRO


- Shock Absorbing Structure for Gimbal
- Dust & Spot-proof : IP54
- Compact & Easy to use
- Available to use detector (Option : TL-RE)
- With Fine-adjustment function

TL-03



1V1H : Cross Line
DP+UP : 2Points

New Technology
Shock Absorbing Structure protects a pendulum from shocks or vibrations

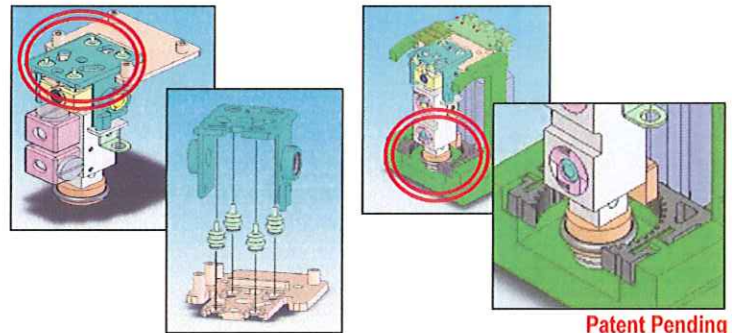

Patent Pending

SPECIFICATIONS	
LASER SOURCE	Visible Red Beam
WAVELENGTH	635nm(630-660nm)
OUTPUT POWER	Less than 1mW
WIDTH OF LASER LINE	Less than 1.5mm per 5m
FAN ANGLE	
FOR HORIZONTAL LINE	100°
FOR VERTICAL LINE	110°
ACCURACY FOR H/V LINE	±1.0mm/5m
ACCURACY FOR PLUMB POINT	±1.0mm/ 3m
ACCURACY FOR DPBP POINT	±0.5mm/ 1m
LEVELING	2-Axis Gimbal System
SELF-LEVELING RANGE	±2°
DAMPING SYSTEM	Magnetic Damper
POWER SUPPLY	3XAA Alkaline Batteries (Rechargeable nikel hydride battery can be used)
CONTINUOUS OPERATION TIME	Approx. 30h
OPERATING TEMPERATURE	-5°C to 50°C
WORKING RANGE	±15m without Detector, ±50m with Detector
IEC LASER CLASS	Class 2M
DIMENSIONS	90 x 131 x 131mm
WEIGHT	about 710g
STANDARD ACCESSORIES	3XAA Alkaline Batteries, Carrying Case

Designs and specifications are subject to change without notice

OPTIONS



DETECTOR TL-RE ROD CLAMP TC-2 ELEVATOR TRIPOD LET-B

myzox
Myzox Co., Ltd.

Internatinal Div.:
401 Yamagoe Nagakute-cho, Aichi-gun
Aichi 480-1111 JAPAN
Phone +81-(0)561-64-2210
FAX +81-(0)561-63-7770
URL <http://www.myzox.co.jp>